

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 096 602 A1**

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
02.05.2001 Bulletin 2001/18

(51) Int Cl.7: **H01Q 1/48**

(21) Application number: **00660187.6**

(22) Date of filing: **18.10.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **01.11.1999 FI 992356**

(71) Applicant: **Filtronic LK Oy**  
**90440 Kempele (FI)**

(72) Inventors:  
• **Isohätälä, Anne**  
**90820 Kello (FI)**  
• **Tarvas, Suvi**  
**90750 Oulu (FI)**  
• **Annamaa, Petteri**  
**90420 Oulu (FI)**

(74) Representative: **Kuplainen, Juhani**  
**c/o Oulun Patenttitoimisto, Berggren Oy Ab,**  
**Teknologiantie 14 D**  
**90570 Oulu (FI)**

### (54) Planar antenna

(57) The invention relates to an antenna structure (400) to be placed inside in particular small radio apparatus. A conventional PIFA-type structure is extended by arranging a structural part (415) adding to the capacitance between the radiating plane (420) and ground plane (410) relatively close to the feed point (F) of the antenna. The structural component may be a projection

extending from the radiating plane towards the ground plane or vice versa. An advantage of the invention is that it achieves a significant increase in the antenna bandwidth without increasing the size of the antenna. Another advantage of the invention is that the structure according to it is simple and the increase in the manufacturing costs is relatively low.

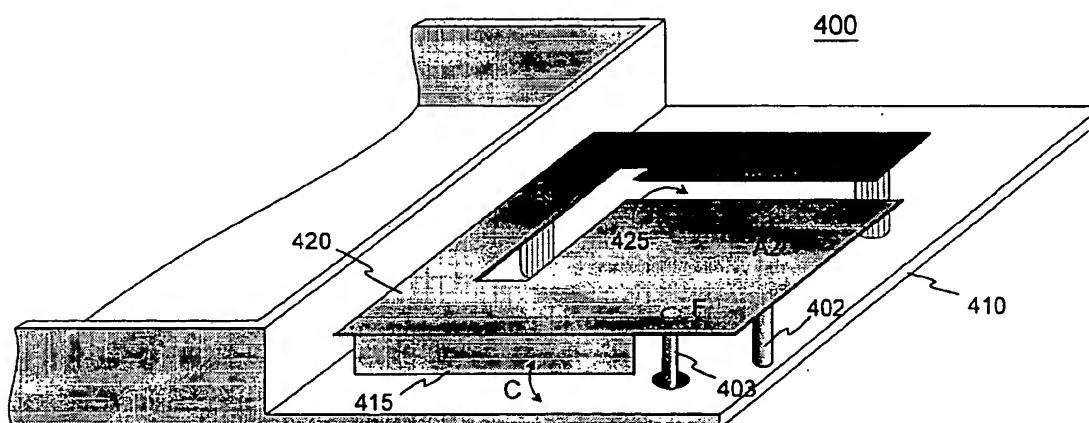


Fig. 4

EP 1 096 602 A1

## Description

[0001] The invention relates in particular to a planar antenna structure installable inside small-sized radio apparatus.

[0002] In portable radio apparatus it is very desirable that the antenna be placed inside the covers of the apparatus, for a protruding antenna is impractical. In modern mobile stations, for example, the internal antenna naturally has to be small in size. This requirement is further emphasized as mobile stations become smaller and smaller. Furthermore, in dual-band antennas the higher operating band at least should be relatively wide, especially if the apparatus in question is meant to function in more than one system utilizing the 1.7-2 GHz band.

[0003] When aiming at a small-sized antenna the most common solution is to use a PIFA (planar inverted F antenna). The performance of such an antenna functioning in a given frequency band or bands depends on its size: The bigger the size, the better the characteristics, and vice versa. For example, decreasing the height of a PIFA, i.e. bringing the radiating plane and ground plane closer to each other, markedly decreases the bandwidth and degrades the efficiency. Likewise, reducing the antenna in the directions of width and length by making the physical lengths of the elements smaller than their electrical lengths decreases the bandwidth and especially degrades the efficiency.

[0004] Fig. 1 shows an example of a prior-art dual-band PIFA. In the Figure there can be seen the frame 110 of the apparatus in question which is drawn horizontal and which functions as the ground plane of the antenna. Above the ground plane there is a planar radiating element 120 which is supported by insulating pieces, such as 105. Between the radiating element and ground plane there is a short-circuit piece 102. The radiating element 120 is fed at a point F through a conductor 103 via a hole in the ground plane. In the radiating element there is a slot 125 which starts from the edge of the element and extends to near the feed point F after having made two rectangular turns. The slot divides the radiating element, viewed from the feed point F, into two branches A1 and A2 which have different lengths. The longer branch A1 comprises in this example the main part of the edge regions of the radiating element, and its resonance frequency falls on the lower operating band of the antenna. The shorter branch A2 comprises the middle region of the radiating element, and its resonance frequency falls on the upper operating band of the antenna. The disadvantage of structures like the one described in Fig. 1 is that the tendency towards smaller antennas for compact mobile stations may degrade the electrical characteristics of an antenna too much; the bandwidth of the higher resonance band may be insufficient, for example.

[0005] From the prior art it is not known solutions that would significantly increase the bandwidth of a PIFA

without increasing the size of the antenna. From earlier applications it is known to the applicant a structure in which the bandwidth is increased by making the slot of the radiating element in two portions having a certain ratio of widths (FI 991807), as well as a structure in which the bandwidth is increased by adding above the radiating plane a second radiating plane and by placing dielectric material between these planes and on top of the uppermost plane (FI 992268).

[0006] In the solution disclosed herein the bandwidth of a PIFA is increased by increasing in a certain area the capacitance between the ground plane and radiating plane by means of conductors. Such increasing of capacitance is known per se in the prior art. Fig. 2 shows a simplified example in which the radiating plane 220 has been bent at its edge towards the ground plane 210. Between the bend 215 and ground plane there is then a certain additional capacitance C. Fig. 3 shows a structure known from publication US 5,764,190 where there is between the radiating plane 320 and ground plane 310 a relatively small parallel plane 315 in galvanic contact with the former to increase the capacitance. In these cases, the structural part increasing the capacitance is at the opposite end of the antenna in relation to the feed place determined by the feed conductor 203 (303) and short-circuit conductor 202 (302), and the purpose of the structural part is mainly to reduce the physical size of the antenna.

[0007] The object of the invention is to increase in a novel manner the bandwidth of a small-sized PIFA. A structure according to the invention is characterized by what is expressed in the independent claim 1. Some preferred embodiments of the invention are presented in other claims.

[0008] The basic idea of the invention is as follows: A conventional PIFA-type structure is extended by forming the structural part adding to the capacitance between the radiating plane and ground plane relatively close to the feed point of the antenna. The structural part may be a projection pointing from the radiating plane to the ground plane or vice versa.

[0009] An advantage of the invention is that it achieves a significant increase in the antenna bandwidth without increasing the size of the antenna. Another advantage of the invention is that the structure according to it is simple and the increase in the manufacturing cost is relatively low.

[0010] The invention is below described in detail. Reference will be made to the accompanying drawings in which

- Fig. 1 shows an example of a PIFA according to the prior art,
- Fig. 2 shows an example of a known structure intended to increase capacitance,
- Fig. 3 shows a second example of a known structure intended to increase capacitance,
- Fig. 4 shows an example of an antenna structure ac-

- cording to the invention,  
 Fig. 5 shows a second embodiment of the invention,  
 Fig. 6 shows a third embodiment of the invention,  
 Fig. 7 shows a fourth embodiment of the invention,  
 Fig. 8 shows an example of the characteristics of an antenna according to the invention, and  
 Fig. 9 shows an example of a mobile station equipped with an antenna according to the invention.

[0011] Figs. 1, 2 and 3 were already discussed in connection with the description of the prior art.

[0012] Fig. 4 shows an example of the antenna structure according to the invention. An antenna 400 comprises a ground plane 410 and radiating plane 420. A short-circuit conductor 402 and antenna feed conductor 403 are in this example joined to the radiating plane near a corner of this. The radiating plane has a slot 425 that divides it, viewed from the feed point F, into two branches A1 and A2 which have clearly unequal resonance frequencies. The example thus shows a dual-band structure. In accordance with the invention a conductive projection 415 towards the ground plane is joined to the radiating plane relatively near the feed point F. The projection 415 is formed e.g. by bending a projection originally formed on the plane 420 on the side facing the feed point into a right angle. Between the projection 415 and ground plane 410 there is a certain capacitance C. This effectively compensates for the inductive part of the antenna feed impedance, thus producing acceptable matching over a significantly wider frequency band than without said projection. The arrangement according to Fig. 4 can be used to widen the higher frequency band in particular, which indeed often needs to be done.

[0013] Fig. 5 shows a second example of the arrangement according to the invention. There is an antenna 500 comprising a ground plane 510, radiating plane 520, and a short-circuit conductor 502 therebetween. In accordance with the invention there is joined to the radiating plane a conductive projection 515 pointing towards the ground plane. In this example the projection is in galvanic contact with the short-circuit conductor 502 such that the short-circuit conductor is very wide starting, as it were, from the radiating plane, and the lower end, i.e. the part connected to the ground plane, is relatively narrow. The projection 515 and short-circuit conductor 502 are formed e.g. by bending a projection originally formed on the plane 520 into a right angle. The arrangement according to Fig. 5 is advantageous especially when the area available for the radiator is relatively large. Extension of the short-circuit conductor decreases the resonance frequencies, which has to be compensated for by making the radiators longer, whereby they become narrower. This reduces the advantage of the structure with small antenna areas.

[0014] Fig. 6 shows a third example of the arrangement according to the invention. There is an antenna 600, comprising a ground plane 610, radiating plane 620

and a short-circuit conductor 602 therebetween. In this example there are two conductive pieces adding to the capacitance between the planes, and they are located on the ground plane side: A first conductive piece 615 extends from the ground plane towards the radiating plane below the edge of the latter, relatively close to the feed conductor 603. Correspondingly, a second conductive piece 616 extends from the ground plane towards the radiating plane underneath the latter, closer to the feed conductor 603 than the first conductive piece.

[0015] Fig. 7 shows a fourth example of the arrangement according to the invention. There is an antenna 700, comprising a ground plane 701, radiating plane 720 and a short-circuit conductor 702 therebetween. In this example the antenna has got one operating band. The conductive piece 715 adding to the capacitance between the planes is now a hollow cylinder around that portion of the feed line 703 which is located between the ground plane and radiating plane, in galvanic contact with the ground plane. Thus, said conductive piece, apart from increasing the capacitance between the planes in the vicinity of the feed point, also reduces the inductiveness of the feed since it has got distributed capacitance with respect to the feed conductor. A piece corresponding to the cylinder 715 could as well be joined to the radiating plane and extend to a certain distance from the ground plane.

[0016] Fig. 8 shows curves of reflection coefficient S11 as a function of frequency, illustrating the effect of the invention on the bandwidths of a dual-band antenna. The result is valid for an exemplary structure according to Fig. 4. Curve 81 illustrates the change in the reflection coefficient of an antenna according to the prior art, and curve 82 the change in the reflection coefficient of a corresponding antenna according to the invention which has got an extension like the projection 415 in Fig. 4. Comparing the curves, one can see that especially the upper operating band, locating in the 1.8 GHz region becomes wider with the arrangement according to the invention. With a reflection coefficient value of 6 dB as a criterion for the band limit, the bandwidth B increases over 1.5-fold: Its relative value increases from a little under six per cent to a little over nine per cent. The lower operating band in the 900 MHz region also becomes somewhat wider.

[0017] Fig. 9 shows a mobile station MS. It has an antenna 900 according to the invention, which in this example is located entirely within the covers of the mobile station.

[0018] Above it was described antenna structures according to the invention. The invention does not limit the shape or quantity of the radiating element(s); for example, there may be on top of an element according to the invention another radiating element. Furthermore, the invention does not limit in any way the manufacturing method of the antenna. The inventional idea can be applied in different ways within the limits defined by the independent claim 1.

**Claims**

1. An antenna structure comprising a planar radiating element, ground plane, short-circuit conductor therebetween, and a feed conductor for the radiating element, **characterized** in that it further comprises conductive material increasing the capacitance between the radiating element and ground plane, placed on that side of the structure where said short-circuit conductor and feed conductor are located, as viewed from the direction of the normal of the radiating element. 5 10
2. The structure of claim 1, **characterized** in that said conductive material forms a part (415) of the radiating element (420), oriented towards the ground plane (410) and located relatively close to feed point F of said radiating element. 15
3. The structure of claim 1, **characterized** in that said conductive material (515) accompanies galvanically by said short-circuit conductor (502). 20
4. The structure of claim 1, **characterized** in that said conductive material forms at least one projection (615, 616) located relatively close to the feed conductor (603) of the radiating element (620) and extending from the ground plane (610) towards the radiating element. 25 30
5. The structure of claim 1, **characterized** in that said conductive material forms a piece (715) positioned around the feed conductor (703) of the radiating element (720). 35
6. A radio apparatus (MS) comprising an antenna (900) that comprises a planar radiating element and ground plane, short-circuit conductor therebetween, and a feed conductor for the radiating element, **characterized** in that said antenna further comprises conductive material increasing the capacitance between the radiating element and ground plane, placed on that side of the structure where said short-circuit conductor and feed conductor are located, as viewed from the direction of the normal of the radiating element. 40 45

50

55


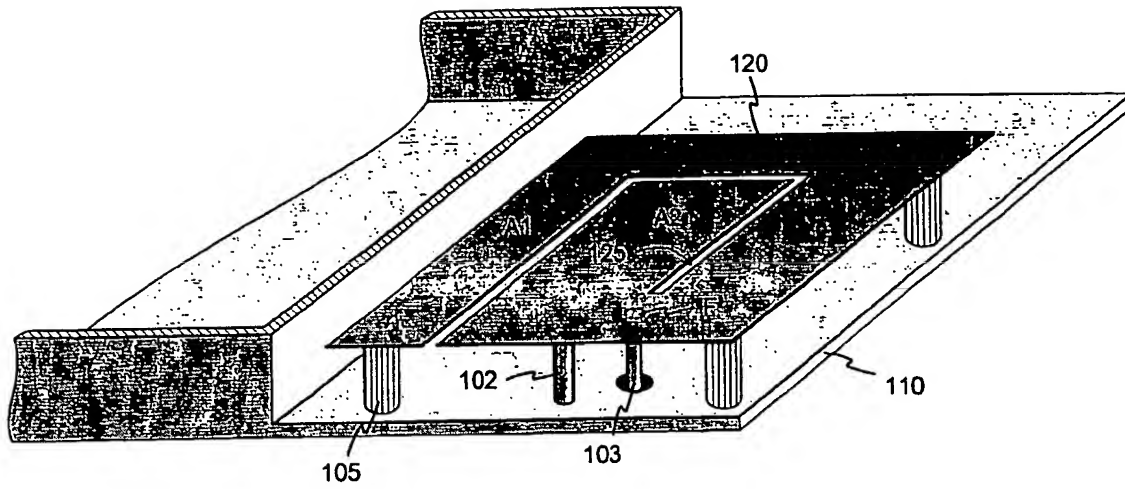




Fig. 1

PRIOR ART

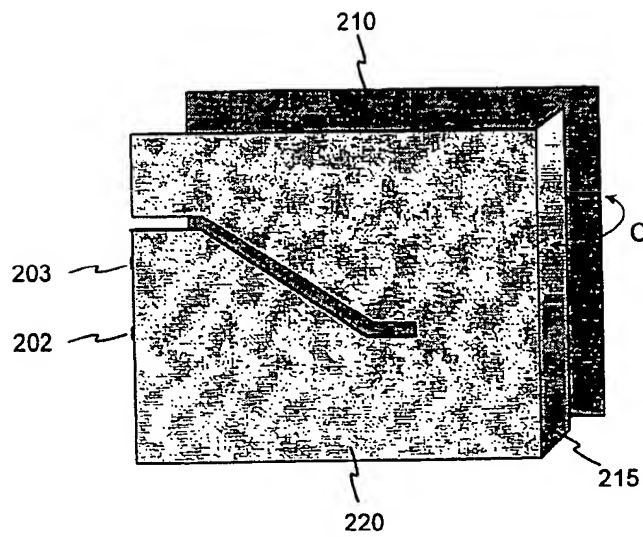

PRIOR ART

Fig. 2

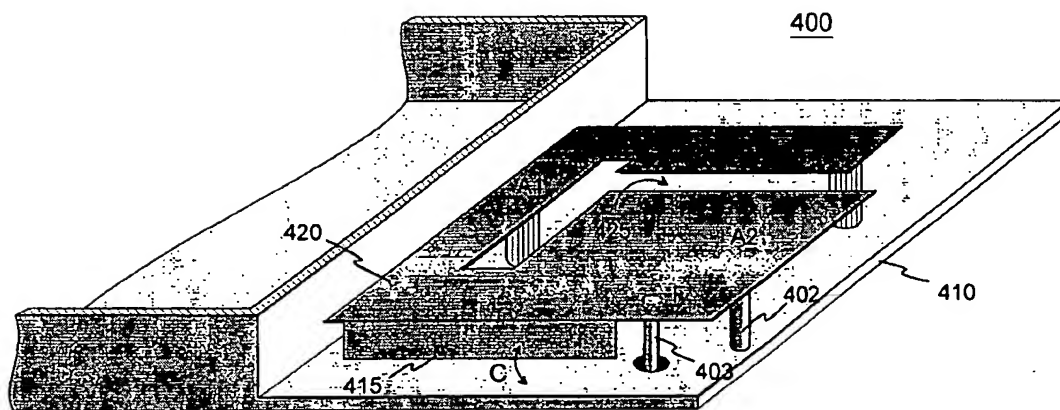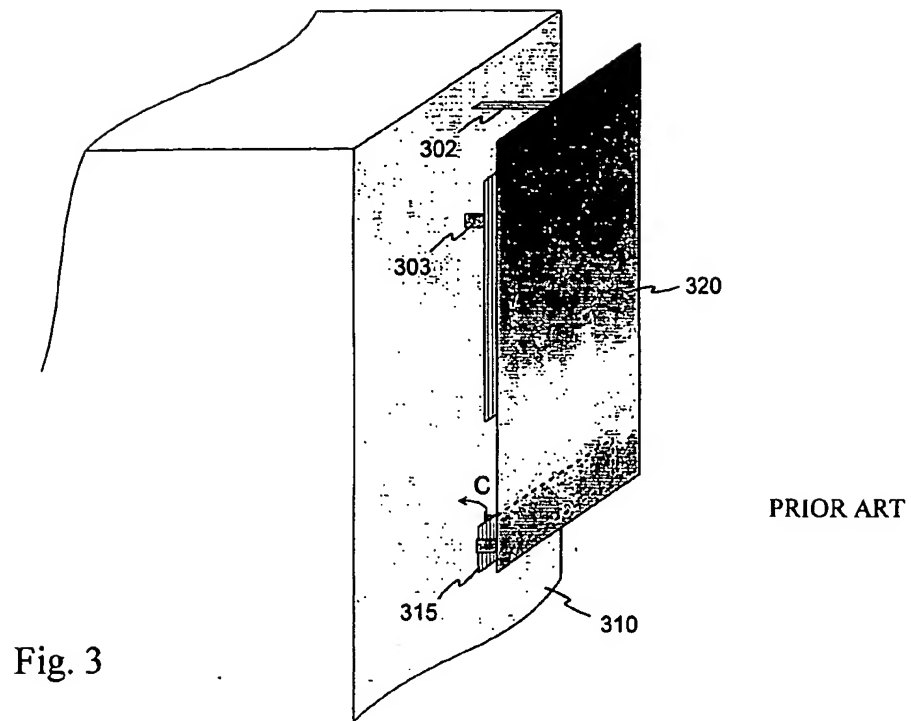

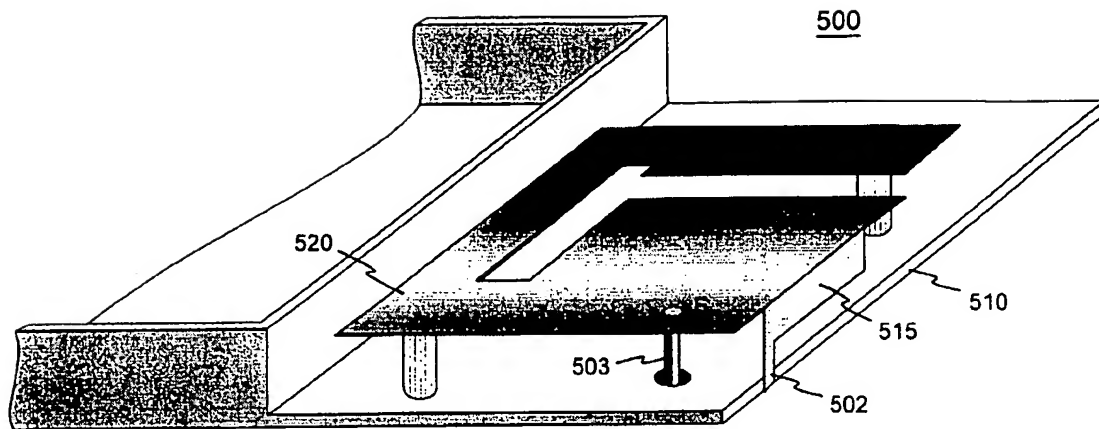


Fig. 5

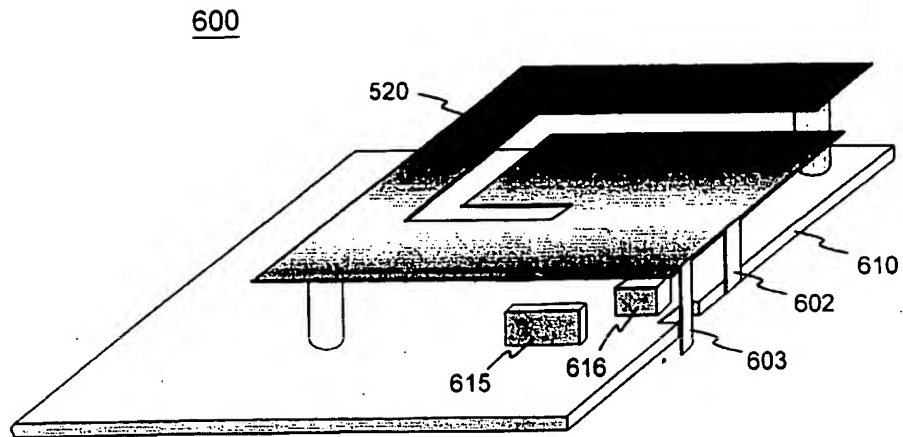


Fig. 6

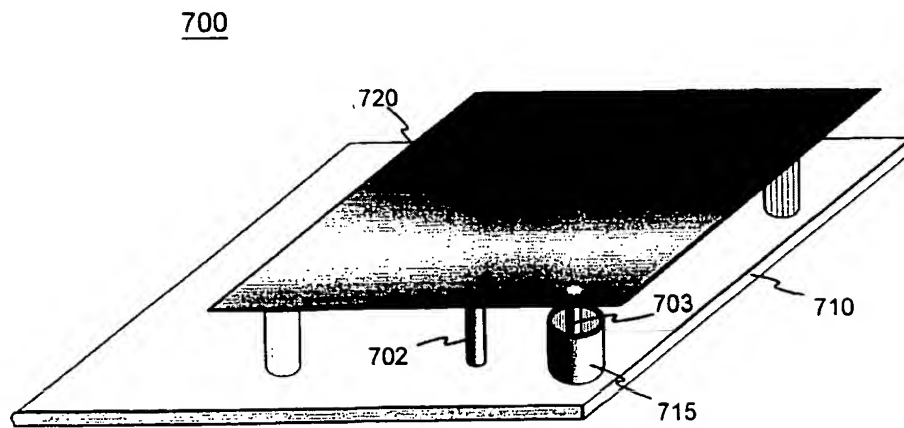


Fig. 7



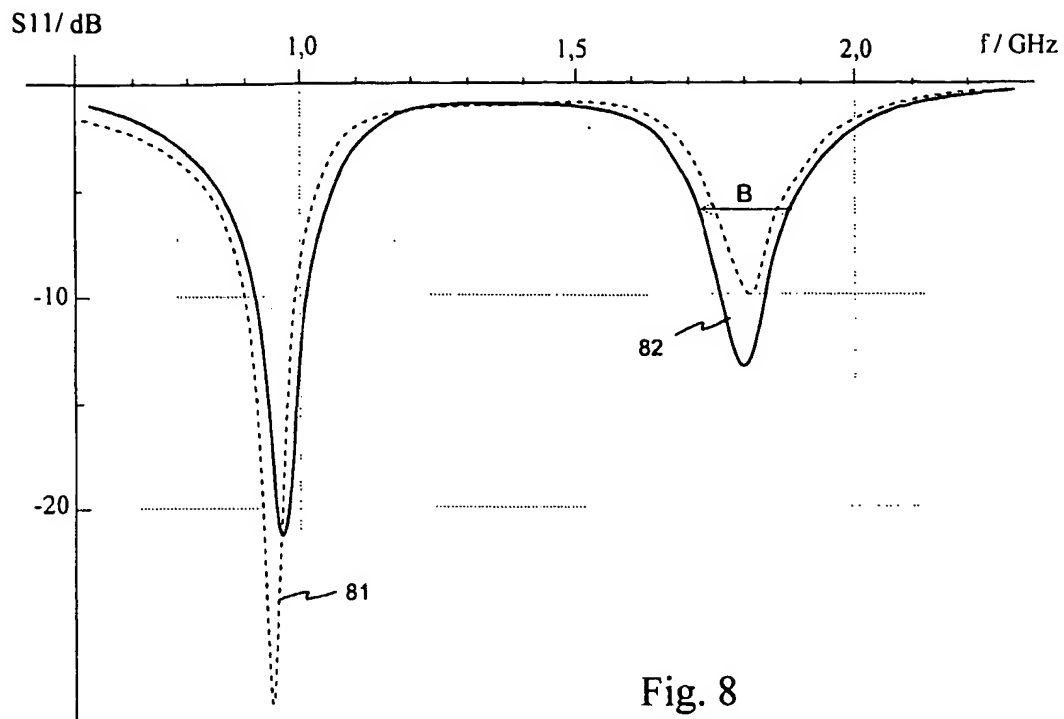


Fig. 8

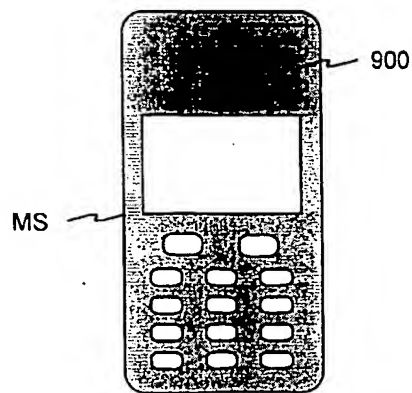


Fig. 9



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 66 0187

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 926 150 A (CROOK GENTRY ET AL) 20 July 1999 (1999-07-20) * column 10, line 41 - column 12, line 54; figures 2-6 *	1-3	H01Q1/48
X	EP 0 526 643 A (MITSUBISHI ELECTRIC CORP ;NIPPON TELEGRAPH & TELEPHONE (JP)) 10 February 1993 (1993-02-10) * column 5, line 20 - column 8, line 6; figures 1-4 *	4	
D,A	US 5 764 190 A (MURCH ROSS DAVID ET AL) 9 June 1998 (1998-06-09) * the whole document *	1-6	
P,A	EP 1 024 552 A (SIEMENS AG) 2 August 2000 (2000-08-02) * the whole document *	1-6	
P,A	EP 1 018 779 A (LK PRODUCTS OY) 12 July 2000 (2000-07-12) * the whole document *	1-6	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H01Q
Place of search <b>MUNICH</b>		Date of completion of the search <b>23 January 2001</b>	Examiner <b>Villafuerte Abrego</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (01.01.99) (p.4/4)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 66 0187

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-01-2001

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5926150	A	20-07-1999	NONE		
EP 0526643	A	10-02-1993	JP	2846482 B	13-01-1999
			JP	4252522 A	08-09-1992
			US	5434579 A	18-07-1995
			WO	9213393 A	06-08-1992
			US	5684492 A	04-11-1997
US 5764190	A	09-06-1998	NONE		
EP 1024552	A	02-08-2000	NONE		
EP 1018779	A	12-07-2000	FI	990006 A	06-07-2000
			CN	1259775 A	12-07-2000

EPD FORM P4459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**